





SYNLAWN®



LANDSCAPE INSTALLATION

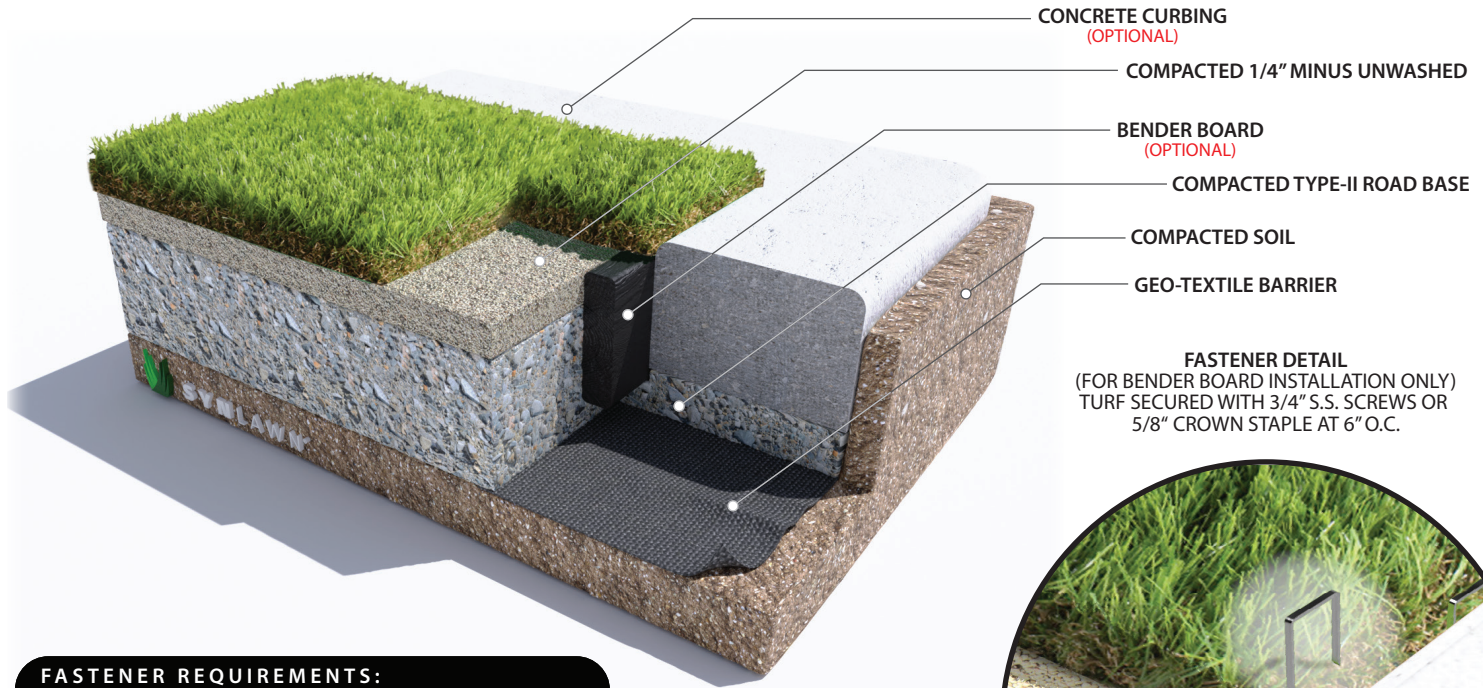

FASTENER DETAIL
 (FOR BENDER BOARD INSTALLATION ONLY)
 TURF SECURED WITH 3/4" S.S. SCREWS OR
 5/8" CROWN STAPLE AT 6" O.C.

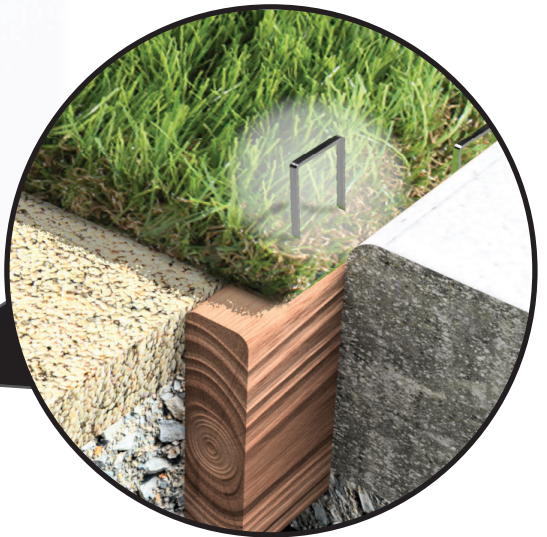


FASTENER REQUIREMENTS:

TURF TO BENDER BOARD:	6" SPACING
• CROWN STAPLE:	5/8"
• SCREW:	3/4" #8 STAINLESS

NOTE: LOCAL ENVIRONMENT MAY REQUIRE OTHER TYPE FASTENER MATERIAL

FIELD SPIKE PLACEMENT:
 (OPTIONAL WHEN ENVIROFILL® USED)

• TURF SPIKE:	10"
• INTERVAL:	24" x 24" GRID PATTERN

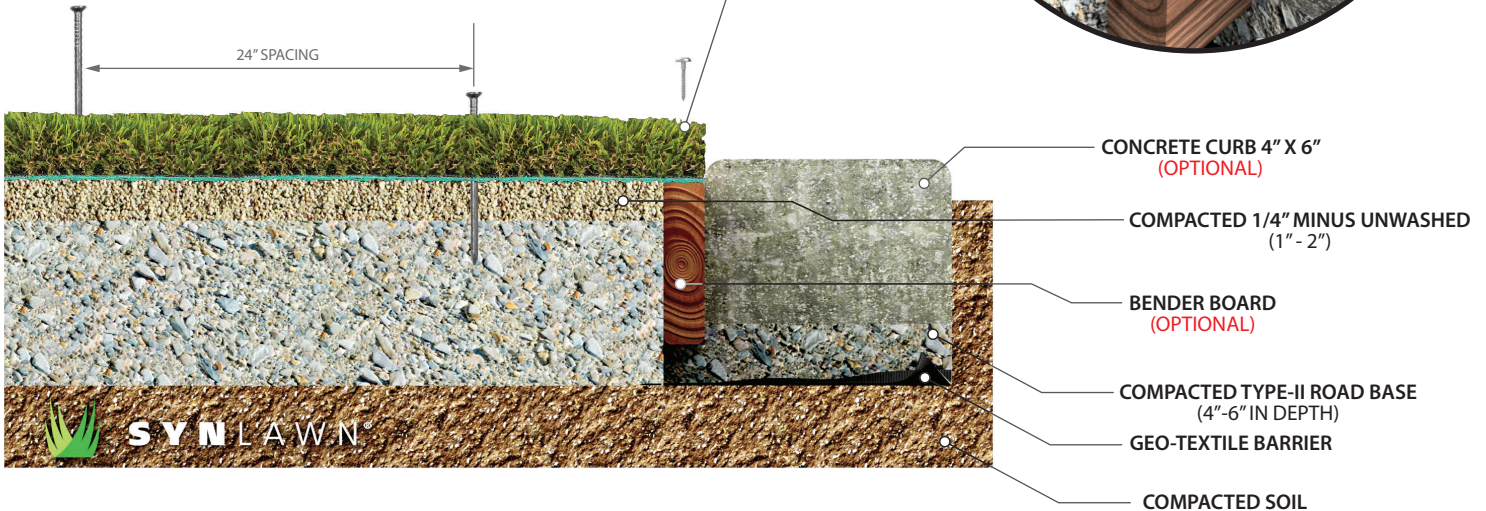

For ordering and questions, contact SYNLawn at 866-796-5296 or visit SYNLawn.com



SYNLAWN®